



Hyperline Systems Canada Ltd.

FO-IN/OUT-TB-MD-XM-CC-OFNR

Features and Benefits

- 900µm Tight Buffers
- Water blocking aramid yarn strength members
- UV resistant jacket, OFNR rated construction
- Exclusive use of Corning® optical fibers
- Jacket print ensures product identification and fiber compatibility
- Buffers strip consistently between 3.5 – 5 lbs-f, helpful for on-site termination
- Durable jacket offers added protection during installation and in rugged use applications

Description

The Indoor/ Outdoor Cable is composed of 2 to 24 colored tight buffers, water blocking aramid yarn, and a UV resistant black PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards.


This Distribution Cable is available in 12 TIA standard colors or special order colors. UL Listed OFNR cables are available, and unlisted, unrated cables can be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers. Customer print can also be accommodated.

Application


Riser
Duct
Indoor/Outdoor

Flame Rating

UL1666

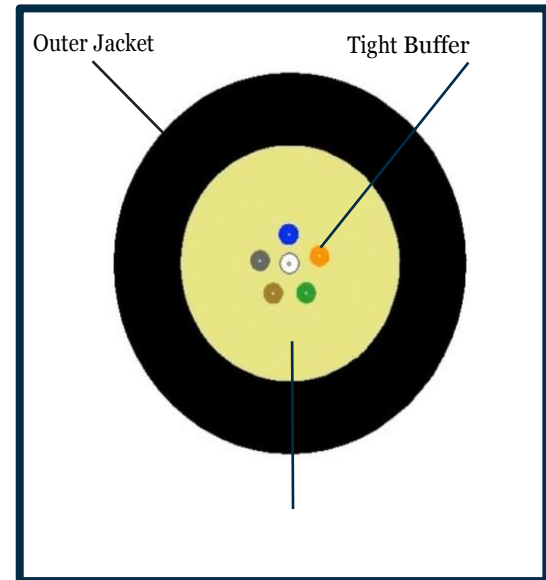

Water Blocking Aramid Yarn

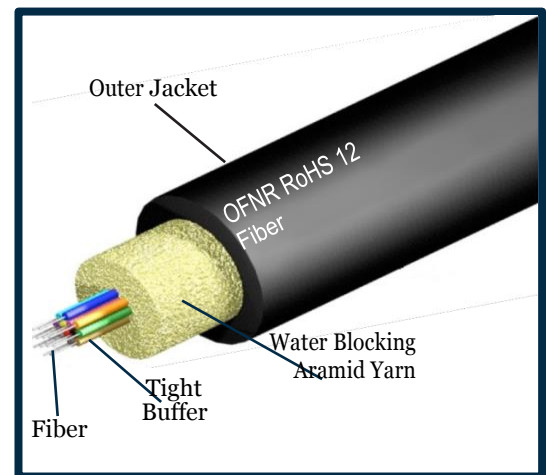

Specifications

Temperature Range	Indoor
Storage Temperature	-40 C to +70 C
Operating Temperature	-40 C to +70 C

Cable Characteristics	
Fiber Count	2, 4, 6, 8, 12, 24
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Available in 12 TIA/ EIA color standard
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	Available in 12 TIA/ EIA color standard

Physical Characteristics	Value
Nominal Outer Diameter (mm) of 2, 4, 6, 8, 12, 24 (fiber count)	4.40/ 4.80/ 5.30/ 5.80/ 6.30/ 8.10
Weight (lbs/ km) of 2, 4, 6, 8, 12, 24 (fiber count)	34/ 45/ 55/ 70/ 94/ 120
Minimum Bend Radius, Installation (cm) of 2, 4, 6, 8, 12, 24 (fiber count)	6.6/ 7.2/ 7.95/ 8.7/ 9.45/ 12.15
Minimum Bend Radius, Operation (cm) of 2, 4, 6, 8, 12, 24 (fiber count)	4.40/ 4.80/ 5.30/ 5.80/ 6.30/ 8.10

Optical Characteristics					
Items	Single Mode	OM1	OM2	OM3	OM4
Core Size	9 um	62.5 um	50 um	50 um	50 um
Wavelength	(1310/ 1550) nm	(850/ 1300) nm	(850/ 1300) nm	(850/ 1300) nm	(850/ 1300) nm
Max. Attenuation	(0.5/ 0.4) dB/ km	(3.5/ 1.5) dB/ km	(3.5/ 1.5) dB/ km	(3.5/ 1.5) dB/ km	(3.5/ 1.5) dB/ km
Bandwidth (EMB) (High Performance)	-	220 MHz @850nm	850 MHz @850nm	2000 MHz @850nm	4700 MHz @850nm
Link Length (10Gb/ s)	-	-	150 mtr	300 mtr	550 mtr

Part Numbers		
Fiber Count	PART NUMBER	Mode
2-24	FO-IN-OUT-TB-MD-9-CC-OFNR	Single Mode
2-24	FO-IN-OUT-TB-MD-62.5-CC- OFNR	OM1
2-24	FO-IN/OUT-TB-MD-50-CC--OFNR	OM2
2-24	FO-IN/OUT-TB-MD-503-CC-OFNR	OM3
2-24	FO-IN/OUT-TB-MD-504-CC-OFNR	OM4



Toll Free: +1-866-634-9737



Toll Free: +1-888-497-3748

www.hyperline.com | info@hyperline.com

2212 Gladwin Crescent, Unit C7, Ottawa, Ontario, K1B 5N1, Canada