

## Patch Cord

### Single Mode/Multi-Mode

Available in: Duplex SC and LC connector type  
Available in: OS2, OM2, OM3 and OM4  
Part no. FC-XX-ZZ-ZZ-XPC-N-LSZH

IN BUSINESS SINCE 2005  
**Hyperline**  
CABLING SYSTEMS

#### Patch Cord Legend

XX = 9, 50, 503, 504  
ZZ = LC, SC  
XPC = PC, APC, UPC  
N = 1, 3, 5, 10, 15,  
20, 30 meters




## Adapter Plate

### Blank

Available in: 6 or 8 port  
Duplex SC, LC and ST  
connector type  
Part no. ADPLB-ZZ-N-BK

#### Adapter Plate Legend

ZZ = BL, SC, DSC,  
LC, DLC, QLC, ST  
N = 6, 8

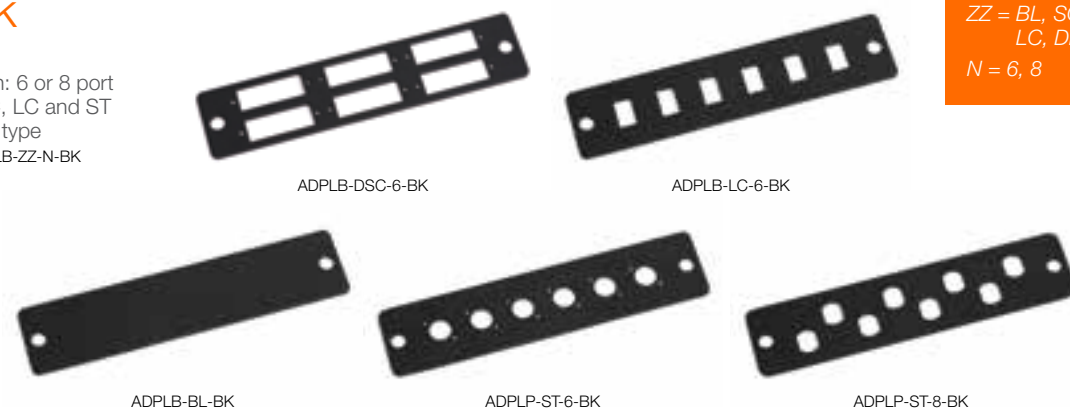

IN BUSINESS SINCE 2005  
**Hyperline**  
CABLING SYSTEMS

[www.hyperline.com](http://www.hyperline.com)

## Fiber Optic Solutions

*New beginnings with traditional values*

Contact your local distributor



IN BUSINESS SINCE 2005  
**Hyperline**  
CABLING SYSTEMS

## Fiber Optic Solutions

*New beginnings with traditional values*



**Bicsi**  
CORPORATE  
MEMBER

United States (888) 497-3748 Canada (866) 634-9737

[www.hyperline.com](http://www.hyperline.com) [info@hyperline.com](mailto:info@hyperline.com)

# Bulk Head (Adapter)

## Simplex/Duplex

Available in: SC and LC connector type in simplex, duplex and quad  
Available in: OS2 (PC/APC/UPC) OM2, OM3 and OM4  
Part no. FAD-ZZ-ZZ-XPC-XX



LC simplex (single mode/multi-mode)



LC duplex (single mode/multi-mode)



LC quad (single mode/multi-mode)



SC simplex (single mode/multi-mode)



SC duplex (single mode/multi-mode)

### Adapter Legend

ZZ = LC, DLC, QLC, SC, DSC  
XPC = PC, APC, UPC  
XX = OS2, OM2, OM3, OM4

# Cable

## Indoor

Available in: Tight buffer and loose tube from 1 – 144 cores  
Available in: OS2, OM2, OM3 and OM4 in OFNR/OFNP  
Part no. FO-IN-WW-XX-YY-QQ



## Indoor/Outdoor

Available in: Tight buffer and loose tube from 1 – 144 cores  
Available in: OS2, OM2, OM3 and OM4 in OFNR/OFNP  
Part no. FO-IN/OUT-WW-XX-YY-QQ



## Fiber to the Home

Available in: Single mode from 1 – 2 cores  
Available in: Flat or round type  
Part no. FO-FTTH-A-NS-XSP-LSZH



## Outdoor

Available in: Direct burial, corrugated steel armored and self-supporting from 1 – 144 cores  
Available in: OS2, OM2, OM3 and OM4 in PE jacket  
Part no. FO-TT-OUT-XX-YY-PE



Direct burial

Corrugated steel armored

Self-supporting

# Connector

## Field Installable Connector

Available in: Pre-polished SC and LC connector type (0.9mm/2mm/3mm)  
Available in: OS2 (PC/APC/UPC) OM2, OM3 and OM4  
Part no. FIC9-ZZ-XPC-D-XX



### Cable Legend

WW = TB, LT  
XX = 9, 50, 503, 504  
YY = 1 – 144  
QQ = OFNR, OFNP  
A = G657A, G6571, G6572  
N = 1, 2  
S = R, F (Round/Flat)  
XSP = OSP, ISP  
TT = CSA, DB, SS

### Connector Legend

ZZ = LC, SC  
XPC = PC, APC, UPC  
D = 0.9, 2.0, 3.0 mm  
XX = 9, 50, 503, 504

# Enclosure

## 19" Fixed Type



Available in: 1, 2, 3 and 4 unit  
Available from 6-96 port  
Part no. FDF-19-NU-FR-XXSC-BK

## 19" Sliding Type



Available in: 1, 2, 3 and 4 unit  
Available from 6-96 port  
Part no. FDF-19-NU-SR-XXSC-BK

## Indoor Wall Mount

Available in: 1, 2, 3 and 4 unit  
Available in: 24, 48, 72 and 96 port  
Part no. FDF-BOX-WALL-XXSC-BK



### Enclosure Legend

N = 1, 2, 3, 4  
XX = 24, 48, 72, 96

# Pigtail

## Single Mode/Multi-Mode

Available in: SC and LC connector type  
Available in: OS2, OM2, OM3 and OM4 in LSZH jacket  
Part no. FPT9-XX-ZZ-XPC-N-LSZH



### Pigtail Legend

XX = 9, 50, 503, 504  
ZZ = LC, SC  
XPC = PC, APC, UPC  
N = 1, 1.5, 2, 3 meters