


Keystone jack RJ45 Cat 5e Vertical Type Dual IDC

KJ7-8P8C-C5E-90-LA

Hyperline
CABLING SYSTEMS

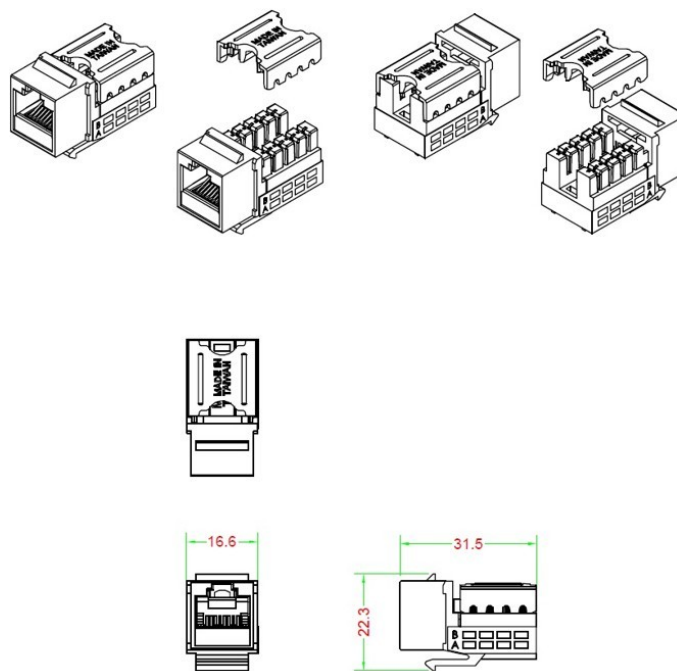

Performance:

Meets C5e EIA/TIA 568B Standard.

Materials:

Body : Fireproof ABS UL-94V0
Jack : 8P8C 6 micro inches gold plated
PCB : FR-4 / UL-94V0
IDC Cap : Fireproof ABS UL-94V0
IDC Body : Fireproof ABS UL-94V0
IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.
For 110 punch-down Tool

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps .
DC Resistance : 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 m

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)
Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

Ordering

KJ7-8P8C-C5E-90-LA	Keystone Jack RJ45 Cat 5e Vertical Type Dual IDC Almond
--------------------	---